

Optimization of Process Parameter of WEDM: A Review

Ravi Kumar¹ and Gurpreet Singh Virk²

¹M.Tech Research Scholar L.R.I.E.T. SOLAN

²L.R.I.E.T. SOLAN

E-mail:¹rthakur94@gmail.com, ²er.gurpreetvirk@Yahoo.com

Abstract—Wire-cut Electrical Discharge Machining (WEDM) is extensively used in machining of conductive materials producing intricate shapes with high accuracy. This study exhibits that WEDM process parameters can be altered to achieve betterment of Material removal rate(MRR),Surface Roughness (SR). The main goals of WEDM manufacturers and users are to achieve a better stability and higher productivity of the WEDM process, i.e., higher machining rate with desired accuracy and minimum surface damage. However, due to a large number of variables and the stochastic nature of the process, even a highly skilled operator working with a state-of-the-art WEDM is unable to achieve the optimal performance and avoid wire rupture and surface damage as the machining progresses.

Keywords: Ton ,Toff,IP, MRR, SR, and orthogonal array, WEDM.

1. INTRODUCTION

Electrical Discharge Machining, EDM is one of the most accurate manufacturing processes available for creating complex or simple shapes and geometries within parts and assemblies. EDM works by eroding material in the path of electrical discharges that form an arc between an electrode tool and the work piece. EDM manufacturing is quite affordable and a very desirable manufacturing process when low counts or high accuracy is required. Turnaround time can be fast and depends on manufacturer back log. The EDM system consists of a shaped tool or wire electrode, and the part. The part is connected to a power supply. Sometimes to create a potential difference between the workpiece and tool, the work piece is immersed in a dielectric (electrically non conducting) fluid which is circulated to flush away debris. The cutting pattern is usually CNC controlled. Many EDM machine electrodes can rotate about two-three axis allowing for cutting of internal cavities. This makes EDM a highly capable manufacturing process.

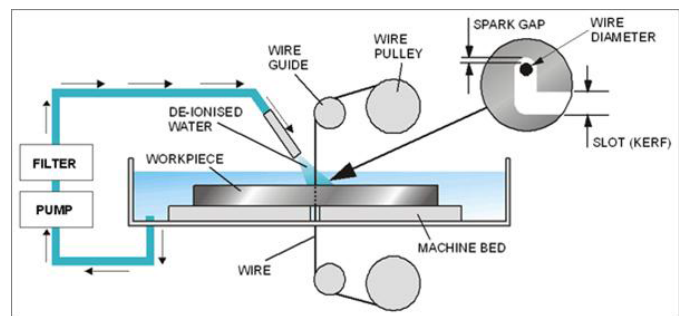


Fig. 1.1: Schematic Diagram of WEDM System [1]

Electrical discharge wire cutting, more commonly known as wire electrical discharge machining (WEDM), is a spark erosion process used to produce complex two- and three-dimensional shapes through electrically conductive workpieces by using wire electrode. The sparks will be generated between the workpiece and a wire electrode flushed with or immersed in a dielectric fluid. The degree of accuracy of workpiece dimensions obtainable and the fine surface finishes make WEDM particularly valuable for applications involving manufacture of stamping dies, extrusion dies and prototype parts. Without WEDM the fabrication of precision workpieces requires many hours of manual grinding and polishing. wire electrical discharge machining (WEDM) has been improved significantly to meet the requirements in various manufacturing fields ,especially in the precision die industry. WEDM is a thermo electrical process in which material is eroded from the workpiece by a series of discrete sparks between the workpiece and the wire electrode (tool) separated by a thin film of dielectric fluid (deionized water) that is continuously fed to the machining zone to flush away the eroded particles. The movement of wire is controlled numerically to achieve the desired three-dimensional shape and accuracy of the workpiece. Electrical Discharge Machining, EDM is one of the most accurate manufacturing processes available for creating complex or simple shapes and geometries within parts and assemblies. EDM works by eroding material in the path of electrical discharges that form

an arc between an electrode tool and the work piece. EDM manufacturing is quite affordable and a very desirable manufacturing process when low counts or high accuracy is required. Turnaround time can be fast and depends on manufacturer back log. The EDM system consists of a shaped tool or wire electrode, and the part. The part is connected to a power supply. Sometimes to create a potential difference between the workpiece and tool, the work piece is immersed in a dielectric (electrically non conducting) fluid which is circulated to flush away debris. The cutting pattern is usually CNC controlled. Many EDM machine electrodes can rotate about two-three axis allowing for cutting of internal cavities. This makes EDM a highly capable manufacturing process. [2]

The WEDM process consists of three operations, a roughing operation, a finishing operation, and a surface finishing operation. The performance of various types of cutting operations is judged by different measures. In rough cutting operation both metal removal rate and surface finish are of primary importance. In finish cutting operation, the surface finish is of primary importance. Dimensional accuracy is highly dependent on cutting width. This means that the rough cutting operation is more challenging because three goals must be satisfied simultaneously. Hence, the rough cutting phase is investigated in the present approach considering three performance goals like MRR, SF.

2. LITERATURE REVIEW

R.Nagaraja, K.Chandrasekaran, S.Shenbharaj (2015) presents an investigation on the optimization of machining parameters in WEDM of bronze-alumina MMC. The main objective is to find the optimum cutting parameters to achieve a low value of Surface roughness and high value of material removal rate (MRR). The cutting parameters considered in this experimental study are, pulse on time (Ton), pulse off time (Toff) and wire feed rate. The settings of cutting parameters were determined by using Taguchi experimental design method. An L9 orthogonal array was chosen. Signal to Noise ratio (S/N) and analysis of variance (ANOVA) was used to analyze the effect of the parameters on surface roughness and to identify the optimum cutting parameters. The contribution of each cutting parameters towards the surface roughness and MRR is also identified. The study shows that the Taguchi method is suitable to solve the stated problem with minimum number of trails as compared with a full factorial design.

R.Pandithurai, I. Ambrose Edward (2014) illustrates that WEDM involves complex physical and chemical process including heating and cooling. The electrical discharge energy affected by the spark plasma intensity and the discharging time will determine the crater size, which in turn will influence the machining efficiency and surface quality. This paper presents an effective approach to optimize process parameters for Wire electro discharge machining (WEDM). WEDM is extensively used in tool and die industries. Precision and intricate machining are the strengths.

While machining time and surface quality still remains as major challenges. The main objective of this study is to obtain higher material removal rate (MRR) and lower surface roughness (SR). Ton, T off, Gap voltage and wire feed rate are the four control factors taken each at various levels. The genetic algorithm optimization tool is used to find the factors level that create a low surface roughness in WEDM.

P. Abinesh , Dr. K. Varatharajan , Dr. G. Satheesh (2014) Kumar study exhibits that WEDM process parameters can be altered to achieve betterment of Material removal rate(MRR),Surface Roughness (SR) and Electrode Wear. The objective of our project is to investigate and optimize the potential process parameters influencing the MRR, SR and Electrode Wear while machining of Titanium alloys using WEDM process. This work involves study of the relation between the various input process parameters like Pulse-on time(Ton), Pulseoff time(Toff), Pulse Peak Current(IP), Wire material and Work piece material and process variables. Based on the chosen input parameters and performance measures L-16 orthogonal array is selected to optimize the best suited values for machining for Titanium alloys by WEDM.

J. T. Huang a & Y. S. Liao experimented (2013) optimization of machining parameters of Wire-EDM based on Grey relational and statistical analyses it is concluded that table feedrate and Ton have the main influence in MRR, and Ton has a significant influence on G and Ra.

Navjot Singh, et al(2013) studied for material removal rate by using two different wires as electrodes in a WEDM machine. The effects of input parameters were evaluated using ANOVA for S/N ratios. In addition, main effects plots for S/N ratios has been developed and analyzed.

Harshad kumar C. Patel et al (2012) found Process parameters affect different response in different ways MRR increase by increasing Pulse on Time, flushing pressure and reduces with increasing Pulse OFF Time. Increasing Pulse ON Time also increase Surface Roughness. Material Thickness has little effect on MRR but it has significant effect over surface finish. Increasing Thickness reduces Surface Roughness and increase surface finish. Little interaction effect found for Surface Roughness between wire tension and flushing pressure.

S.R.Nithin Aravind(2012) found five optimal control parameters input voltage, current, speed, pulseon/off time to maximize metal removal rate (MRR) and minimize surface roughness (SR) on wire edm (electrical discharge machining). For the purpose to get a best solution to maximize MRR and reduce SR, he optimize parameters using taguchi method. Also he compares experimental reading with taguchi optimum result to know the optimal solution.

Amoljit Singh Gill (2012) conducted on deep cryogenic treated OHNS die steel by WEDM Cryogenic treatment of the workpiece significantly improves the surface finish of machined surface. analysis of various process parameters.

Bijendra Diwakar (2012) researched the work, through the Taguchi methodology found the optimum process parameters for CNC wire electric discharge machining (WEDM). The research is to optimize the MRR and Surface Roughness of work piece high chromium high carbon (HCHC) die steel tool. This methodology based on Taguchi's, analysis of variance (ANOVA) and signal to noise ratio (S/N Ratio) to optimize the CNC WEDM process parameter. The design of experiment for machining process control parameter are Voltage(A), Discharge current(B), Pulse duration(C), Pulse frequency(D) and Wire Tension(E) L27 (3*5) standard orthogonal array design of experiment three level and five parameter A,B,C,D and E respectively for each combination we have conducted one experiment.

Jatinder Kapoor (2011) studied the results of the effect of Cryogenic treated brass wire electrode on the surface of an EN-31 steel machined by WEDM. Full factorial experimental design strategy is used in the experimentation. Three process parameters, namely type of wire electrode (untreated and cryogenic treated brass wire electrodes), Pulse width, and wire tension have been considered. The process performance is measured in terms of surface roughness (SR). Type of wire, pulse width and wire tension significantly affect the SR in WEDM ANOVA results indicated that all the process parameters have significant effect on SR.

3. CONCLUSION

The review is done based on previous and recent research on WEDM. MRR, SR, are the performance measures of EDM. The performance of these process parameters are affected by various process parameters during machining. The review paper evaluates various process techniques used during machining and various optimization techniques applied for improvement of MRR and SR. This helps in identifying optimization parameters technique for WEDM work.

REFERENCES

- [1] Amar pattnaik and S.S Mohapatra, (2006) "Optimization of WEDM process parameters using Taguchi method", International Journal of Advanced manufacturing Technology.
- [2] Ahmet Hascalk, (2007) "Electrical discharge machining of titanium alloy (Ti-6Al-4V)" Applied Surface Science 253 9007-9016.
- [3] P. Abinesh, Dr. K. Varatharajan , Dr. G. Satheesh Kumar," Optimization of Process Parameters Influencing MRR, Surface Roughness and Electrode Wear During Machining of Titanium Alloys by WEDM", International Journal of Engineering Research and General Science Volume 2, Issue 4, June-July, 2014.
- [4] R.Pandithurai, I. Ambrose Edward," Optimizing surface roughness in Wire-EDM using machining parameters", International Conference on Innovations in Engineering and Technology (ICIET'14).
- [5] R.Nagaraja, K.Chandrasekaran, S.Shenbhgaraj (2015)," Optimization Of Parameter For Metal Matrix Composite In WIRE EDM", International Journal Of Engineering Sciences & Research Technology, February, 2015.
- [6] Navjot Singh, Parlad Kumar, Khushdeep Goyal(2013) "Effect Of Two Different Cryogenic Treated Wires In Wire Electrical Discharge Machining Of AISI D3 DIE STEEL" Journal of Mechanical Engineering, Vol. ME 43 , No. 2,
- [7] Harshadkumar C. Patel, Dhaval M. Patel, Rajesh Prajapati (July-August 2012), "Parametric Analysis And Mathematical Modelling Of MRR And Surface Roughness For H-11 Material On Wire Cut EDM By D.O.E Approach" Vol. 2, Issue4, pp.1919-1924.
- [8] S.R.Nithin Aravind (March 2012) "Optimization of metal removal rate and surface roughness on wire edm using taguchi method".
- [9] Bijendra Diwakar, Vedansh Chaturvedi and Jyoti Vimal (July 2012), "Application of taguchi approach for optimization of CNC wire electrical discharge machining process parameters".
- [10] Jatinder Kapoor, Jaimal Singh Khamba, Sehijpal Singh (Oct. 7-8,2011) "Effects of cryogenic treated wire electrode on the surface of an EN-31 steel machined by WEDM" National Conference on Advancements and Futuristic Trends in Mechanical and Materials Engineering.