

# Apple Pomace: A Potential Substrate for Ethanol Production

Tehmeena Ahad and Jasia Nissar

*Sheri-kashmir University of Agricultural Sciences and Technology, Kashmir*

---

**Abstract**—Apple pomace is the main by-product resulting from pressing apples for juice or cider. Apple pomace serves as the potential source of ethanol. Apple pomace is a waste and its disposal is a major environmental problem, but being a precious resource, its utilization is a challenge and opportunity to the scientists and technologists. In the present study waste apple pomace left after juice extraction which is generally dumped is used as a substrate for ethanol production in solid state fermentation (SSF) system. Ethanol production was carried out by using three different fungi *Saccharomyces cerevisiae*, *Fusarium oxysporum* and *Aspergillus foetidus*. Percentage of Ethanol estimated by iodometric titration method was found to be highest (1.3501 gm%) by using a combination of three fungi *Saccharomyces cerevisiae*, *Aspergillus foetidus* and *Fusarium oxysporum* followed by *Saccharomyces cerevisiae* (1.354 gm%) and that of combination of *Aspergillus foetidus* and *Fusarium oxysporum* (1.310% gm%). Research on the conversion of fruit waste into ethanol will contribute substantially to bio-based economy.

**Keywords:** Apple Pomace, Ethanol, *Saccharomyces cerevisiae*, *Fusarium oxysporum*, *Aspergillus foetidus*.

## 1. INTRODUCTION

India has a diverse agro-climatic condition that has enabled the country to produce a wide variety of horticultural crops. Amongst these crops, apple (*Malus pumila*) occupies a prominent position in India and world [1]. Apple processing industries are one of the major industries of Himachal Pradesh, Jammu and Kashmir, and Uttaranchal in India, manufacturing various products like juice, concentrates, wine, cider, canned slices, etc. Apple pomace is a left over residue after juice extraction containing peel, seeds and remaining solid parts and represents about 25-35% of the weight of the fresh apple processed [2][3].

Biofuel production is rapidly growing as the world encounters pollution problems due to burning of petroleum and coal based fuels. This reinforces the fact that alternative fuels are important from both environmental and energy security point of view. Apple pomace is the residue left after juice extraction and constitutes about 25-35% of the weight of fresh fruit [4] [5]. It contains a large amount of water and sugar, a small amount of protein, and has a low pH. More than 500 food processing plants in the United States produce a total of about 1.3 million metric tons of apple pomace per years. The direct disposal of agro-industrial residues as a waste in the environment represents an important loss of biomass, which

could be bioconverted into different metabolites, with a higher commercial value.

Apple pomace is a rich source of pectin besides other nutrients like carbohydrates, dietary fibers, minerals and vitamin C [6] [7]. Thus, it can be good substrate for the fermentation, pectin esterase enzyme production or to make animal feed, citric acid, ethanol, and bio-color production [8] which otherwise require a costlier medium for their production [9].

Because of the increasing demand for ethanol, alternative and non-conventional raw materials are under research [10] [11]. Some researchers have documented the potential for ethanol production from fresh wet pomace and this represents a 20% of energy recovery from the total energy in pomace [12]. The present study investigated for the bio-conversion potential of apple pomace to produce bioethanol. Apple pomace is a waste and its disposal is a major environmental problem, but being a precious resource, its utilization is a challenge and opportunity to the scientists and technologists. In the present study waste apple pomace left after juice extraction which is generally dumped is used as a substrate for ethanol production in solid state fermentation (SSF) system.

## 2. METHODS

### Raw Material Used

Apple pomace was collected from fruit juice making industries from Srinagar –kashmir,

### Solid State Fermentation

50gm of apple pomace was added to conical flasks. Each flask was labeled as per the fungal culture added. In one flask only *Saccharomyces cerevisiae* was added, in second flask *Aspergillus foetidus* and *Fusarium oxysporum* were added while in third flask a combination of three fungi i.e. *Saccharomyces cerevisiae*, *Aspergillus foetidus* and *Fusarium oxysporum* were added to the flask containing apple pomace. In each flask ammonium sulphate (1.8%) i.e. 1.3gm and potassium bisulphate (300ppm) was added as supportive material of fungi. The flasks were sealed air-tight to maintain anaerobic condition and kept in stable state for undergoing solid state fermentation for 4-5days [13].

### 3. IODOMETRIC TITRATION METHOD

After fermentation the inoculum in each flask was pressed by using sterilized muslin cloth. Brown coloured extracts were obtained which were collected in different beakers and distributed in test tubes. By iodometric method the percentage of ethanol contained in each flask was estimated.

In a clean dry test tube 1ml of distillate was taken (extract) from each flask and 5ml of  $K_2Cr_2O_7$  was added. Now, it was kept in ice bath for 5 min. Then concentrated  $H_2SO_4$  was added slowly with continuous stirring. The flask was then kept in boiling water bath for 4-5 min. All the flasks were allowed to cool and the contents were transferred into other respective flasks, each of which contained 1 gm of potassium iodide. Each flask was then washed with distilled water and washing was added in flask and mixed well. The flask was kept stable for 4-5 min.

Now, in each of these flasks 1-2 drops of starch indicator was added. The burette was filled with 0.05N thiosulphate and it was used for titration. During titration, firstly colour becomes brown then the titration was continued till the colour of the solution of each flask get changed to pale yellow. Titration was repeated for three times for each flask and the observations were noted. The percentage of ethanol was calculated by using following formula  $N_1V_1 = N_2V_2$ .

Therefore  $V_2 = N_1 V_1 / N_2$

=  $\frac{\text{Normality of hypo} \times \text{Volume of hypo}}{\text{Normality of dichromate solution}}$  Where,  $N_1 = 0.05 \text{ N}$

$V_1$  = Burette reading

$N_2 = 0.3\text{N}$  i.e. normality of dichromate

Let, the amount of dichromate utilized = y ml Therefore,  $y = 5 - x$

Gram % of alcohol =  $y \times \text{alcohol factor} \times 100$

Thus, on the basis of the value of  $V_2$  obtained, the gm% of Ethanol was determined for each combination of fungi along with the apple pomace.


### 4. RESULT AND DISCUSSION

The present study investigated the bio-conversion potential of apple pomace to produce ethanol. Apple pomace left after juice extraction was collected from fruit juice vendors in Nagpur city. The three different types of fungi such as *Saccharomyces cerevisiae*, a combination of two fungi *Aspergillus foetidus* and *Fusarium oxysporum* and a combination of three fungi *Saccharomyces cerevisiae*, *Aspergillus foetidus* and *Fusarium oxysporum* were used for the study.

Iodometric method was carried out for the estimation of ethanol. After fermentation the extract of each combination of *Aspergillus foetidus* and *Fusarium oxysporum* flask was

treated with thiosulphate solution till the colour get changed to pale yellow. From these readings the percentage of ethanol was estimated using the given formula. It was found that a combination of *Saccharomyces cerevisiae*, *Aspergillus foetidus* and *Fusarium oxysporum* has given highest percentage of ethanol (1.3501gm%) followed by *Saccharomyces cerevisiae* (1.354gm%) and that of combination of *Aspergillus foetidus* and *Fusarium oxysporum* (1.310%)(Graph 1).

It was found that the combination of two and three fungi have given more percentage of ethanol than that of the fungi alone. The dried apple pomace was then used as an animal feed. An overview of the present project showed that solid state fermentation of apple pomace has a large economic potential for conversion into ethanol. Solid state fermentation of apple pomace is a simple, high yielding and economically feasible process.

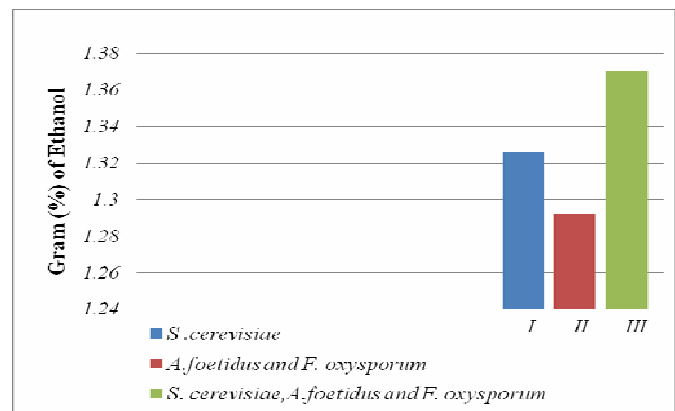

Graph1. Gram (%) of Ethanol Production from fungi

It was found that the combination of two and three fungi have given more percentage of ethanol than that of the fungi alone. The dried apple pomace was then used as an animal feed. An overview of the present project showed that solid state fermentation of apple pomace has a large economic potential for conversion into ethanol. Solid state fermentation of apple pomace is a simple, high yielding and economically feasible process.

These results were correlated with that of the previous findings in which the researchers used different fungi for the production of ethanol which included the *Saccharomyces cerevisiae*, *Aspergillus foetidus* and *Fusarium oxysporum* [13]. In some studies, solid state fermentation had performed for the effective production of ethanol [14], the same process was performed in the present study. Thus in future solid state fermentation could become a potential tool for solid waste management of food processing plant to prevent environment pollution as well. The present study has shown a promising potential for utilizing apple pomace as a noble substrate for the production of ethanol. This was proved in the optimization study of ethanol production from apple pomace [15]. Thus,

apple pomace has a large economic potential for conversion into ethanol.

## 5. CONCLUSION

The present study was conducted for ethanol production from apple pomace by using three different types of fungi. It was concluded that ethanol was produced successfully from all three different fungi and their combination. The highest percentage of ethanol was produced by the combination of

*Saccharomyces cerevisiae*, *Aspergillus foetidus* and *Fusarium oxysporum* has given highest production (1.3501gm %) while *S. cerevisiae* alone has given (1.354 gm %). However, a combination *Aspergillus foetidus* and *Fusarium oxysporum* have given (1.310 gm %) of ethanol.

Research on the conversion of fruit waste into ethanol will contribute substantially to bio-based economy. The future goal of this research should be focused on investigation of the feasibility of utilizing fruit waste into ethanol through simple method. Utilization of lipid and carbohydrates obtained from food waste for ethanol production is an excellent example to demonstrate the enormous potential of waste valorization for building a sustainable society.

## REFERENCES

- [1]. Attri D. and Joshi V. K., Solid state fermentation of apple pomace for the production of value added product, *Natural Product Radiance*. 5 (4), 289-296 (2006).
- [2]. Sargent S.A., Steffe J.F. and Pierson T.R., The economic feasibility of in-plant combustion of apple processing wastes, *Agric Wastes*. 15(2), 85-96 (1986).
- [3]. Wang H.J. and Thomas R.L., Direct use of apple pomace in bakery products, *J. Food Sci.* 54(3), 618-620 (1989).
- [4]. Miller J.E., Weathers P.J., McConville F.X. and Goldberg M., Saccharification and ethanol fermentation of apple pomace, *Biotechnol. Bioeng. Symp.* 12, 183-191 (1982).
- [5]. Hang Y.D. and Woodams E.E., Solid state fermentation of apple pomace for citric acid production, *Mircen. J. Appl. Microbial. Biotechnol.* 2, 283-287 (1986).
- [6]. Joshi V.K., Apple Pomace utilization- Present status and future strategies. In *Advances in Biotechnology*. Ashok Pandey (eds.), Educaional Publishers and Distributors New Delhi, (1998) pp. 141-155.
- [7]. Parmar M., Utilisation of apple pomace for production and evaluation of pectinase(s), M.Sc. Thesis, Dr.Y.S. Parmar University of Horticulture and Forestry, Nauni, Solan, H P. (2003).
- [8]. Joshi V.K., Pandey A. and Sandhu D.K., Fermentation technology for food industry waste utilisation, In *Biotechnology-Food Fementation (Microbiology, Biochemistry and Technology)*, V.K. Joshi and Ashok Pandey (eds.), Educational Publishers and Distributors, (1999) 2, pp.1291- 1348.
- [9]. Joshi, V. K., Gupta K., Devarajan A., Lal B.B. and Arya S.P., Production and evaluation of fermented apple pomace in the feed of broilers, *J. Food Sci. Technol.* 37(6), 609-612 (2000).
- [10]. Mussatto S., Dragone G., Guimarães P., Silva J. and Carneiro L., Technological trends, global market and challenges of bio-ethanol production, *Biotechnol. Adv.* 28, 817-830 (2010).
- [11]. Hang Y. D., Lee C. Y. and Woodams E. E., A Solid state fermentation system for production of ethanol from apple pomace, *J. Food Sci.* 47, 1851-1852 (1982).
- [12]. Jewell W.J. and Cummings K.J., Apple pomace energy and solids recovery, *J. Food Sci.* 49,407- 410 (1984).
- [13]. Chatanta D., Attri C., Gopal K., Devi M., Gupta G. and Bhalla T., Bioethnol Production from Apple Pomace left after Juice Extration, *The Internet Journal of Microbiology*, 5 (2), (2007).
- [14]. Joshi V.K. and Attri D., Solid state fermentation of apple pomace for the production of value added products, *Nat. Prod. Rad.*, 5 (4), 289-296 (2006). iology, S.S.E.S.A's Science College, Nagpur (MS).